

Technical data sheet

EasyCoat™

Acrylic protective coating for coils



EasyCoat™ is an acrylic coating designed to guard coils against corrosive environmental factors such as acid rain, saline atmospheres and airborne ammonia. Its rapid-drying, waterproof, oil-resistant formulation ensures long-term protection for your air conditioning and refrigeration systems.


PRODUCT SPECIFICATION

Name	EasyCoat™
Product Code	S010129GB
Packing Quantity (ml, L)	12 x 600ml
Packing Size (L x H x D cm)	21 x 25 x 27
Shipping Weight (kg)	7.1
Shipping Volume (m ³)	0.0164
Soils	N/A

Special Features

- Rapid drying
- Waterproof
- Oil resistant

Directions of use

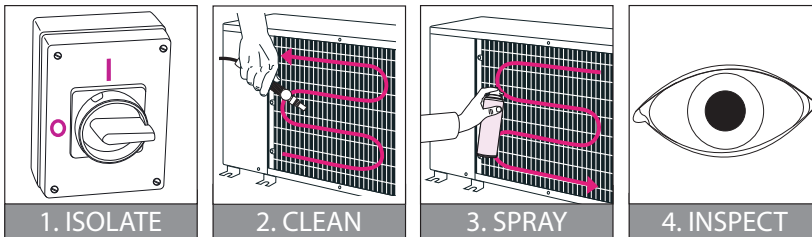

Turn system off. Isolate electrics. Clean coil to remove all contamination and grease – even if coil is new. Ensure coil is dry before proceeding. Spray EasyCoat™ into coil, starting at top, then work methodically down and across. Wherever possible, treat both faces. EasyCoat™ contains a faint dye that allows easy verification of coating.

At each maintenance visit check coating is still intact. Reapply as required. If, due to multiple reapplication, the coating is decreasing heat transfer, request Advanced EasyCoat™ Cleaner to remove all EasyCoat™ – then start again.



EasyCoat™
UN1950
Danger

H222: Extremely flammable aerosol. H229: Pressurised container: May burst if heated. H315: Causes skin irritation. H319: Causes serious eye irritation. H336: May cause drowsiness or dizziness. H361d: Suspected of damaging the unborn child. H373: May cause damage to organs [nervous system] through prolonged or repeated exposure [inhalation (vapour)]. P210: Keep away from heat/sparks/open flames/hot surfaces. - No smoking. P211: Do not spray on an open flame or other ignition source. P251: Pressurized container: Do not pierce or burn, even after use. P260: Do not breathe spray. P280: Wear protective gloves/protective clothing/eye protection/face protection. P304+340: IF INHALED: Remove victim to fresh air and keep at rest in a position comfortable for breathing. P305+351+338: IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing. P410+412: Protect from sunlight. Do not expose to temperatures exceeding 50 °C.

Caution: Pressurised container. Protect from sunlight and do not expose to temperatures exceeding 50 °C.

Do not pierce or burn even after use. Do not spray onto a naked flame or any incandescent material.

Restricted to professional users.

