SPECTROLINE®
LEAK DETECTION

COOLSEAL™

A/C LEAK SEALER

NON-POLYMER
oil-soluble formula

TESTED IN ACCORDANCE WITH ASHRAE 97 STANDARDS FOR CHEMICAL STABILITY

Seals micro leaks in condensers, evaporators, O-rings and hoses. Can add years to older, out-of-warranty AC&R systems that leak small amounts of refrigerant. Works with all popular refrigerants and oils.

- Remains **safely** in system to help protect against future leaks
- Can be injected with system off or running
- Available in three convenient delivery methods

COOLSEAL™ A/C Leak Sealer

- **Non-polymer**, oil-soluble formula
- Non-oxygenated activation
- Not activated by moisture
- Safe for AC&R systems
- Safe for contractor owned tools & equipment
- Non-hazardous formula

Polymer Type Sealants

- Activated by moisture
- Oxygen activated
- Can damage AC&R systems
- Can damage contractor owned tools & equipment
- Exposure to sealant harmful
- May contain flammable liquids

HOW IT WORKS

COOLSEAL™ is a proprietary blend of lubricants and additives. When the sealant is exposed to an environment where there is a dramatic drop in pressure and temperature, a seal will begin to form at the leak site until it is fully sealed.



Once injected into the system, it **LOCATES** and **SEALS** micro leaks formed by pitting, corrosion, loosened fittings or abrasion.

WORKS WITH ALL A2L A3 COMPATIBLE REFRIGERANTS

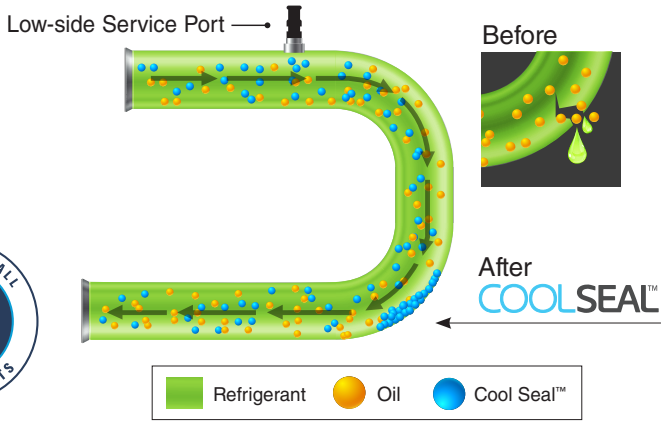

SAFE, NON-POLYMER
Oil-Soluble Formula

Works with A2L & A3 Compatible Refrigerants

UP TO 450 PSI **Works in all AC&R systems,** overcomes system pressure

4 TONS OF COOLING **System Treatment Capacity**

EZ-Ject™ Injection

Connection:

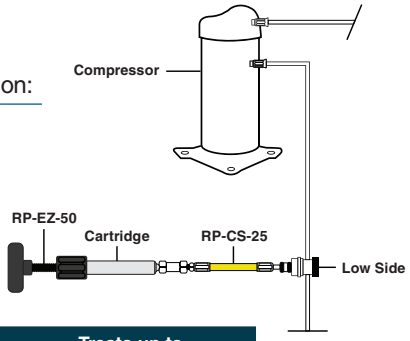

Cool Seal™
A/C Leak Sealer

- 0.5 oz (15 ml) cartridge
- Use with EZ-Ject™ Injector System

Product No.	Description	Treats up to
CS-1CS	(1) EZ-Ject™ cartridge prefilled with Cool Seal™ A/C Leak Sealer	**4 tons** (14.1 kW) of cooling
CS-100CS	**Cool Seal™ EZ-Ject™ Dye Injection Kit:** ▶ **(2) CS-1** 0.5 oz (15 ml) EZ-Ject™ cartridges prefilled with Cool Seal™ A/C Leak Sealer ▶ **RP-EZ-50** EZ-Ject™ dye injector assembly ▶ **RP-CS-25** 8 in (20 cm) Cool Seal™ EZ-Ject™ hose assembly ▶ **RP-AD-410A** R-410a adapter/purge fitting ▶ **Service labels**	**8 tons** (28.1 kW) of cooling

Reusable Injector Assembly:
Save money on unnecessary hardware with each application!

Stick Capsule Injection

Connection:

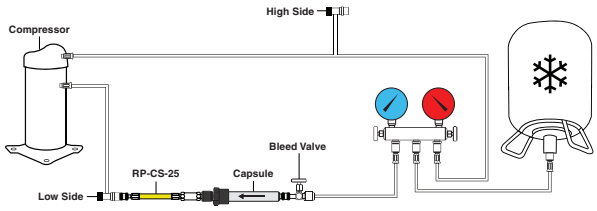

Cool Seal™
A/C Leak Sealer

- 0.5 oz (15 ml) stick capsule
- Requires bleed valve for injection

Product No.	Description	Treats up to
CS-3CS	(1) Stick capsule prefilled with Cool Seal™ A/C Leak Sealer	**4 tons** (14.1 kW) of cooling
RP-BV-50	Bleed valve (sold separately)	

RP-BV-50
Bleed Valve
Requires two (not included)

SCAN QR CODE TO VIEW VIDEO

SPECTRONICS CORPORATION
265 Spagnoli Rd, #100, Melville, NY 11747
(800) 274.8888 | +1 (516) 333.4840
Orders@Spectroline.com
www.Spectroline.com

HVAC/R
10/24 A19255-9
PRINTED IN USA